

**WEMCO®**  
Pumps & Systems

  
281-612-WRXS (9797)

Excellent  
Engineering  
Solutions

**WEH**

Rugged & Dependable Self-Priming, Solids Handling, Trash Pumps

# *Solids Handling Pumps For Tough Jobs*



**Now A  
Standard Upgrade  
On All Pumps!**

# WEMCO®

## Pumps & Systems

Check the boxes of the features you want in a self-priming pump - add up the score at the bottom

Other Self-Priming Pumps	✓
• Steel Shaft	
• Ductile Iron Impeller	
• Cast Iron Casing	
• Cast Iron Bearing Housing	
• Cast Iron Cover Plate	
• Tools needed to adjust Impeller	
• Not all sizes pass stated solid size	
• Shimless impeller adjustment	
Total	✓

✓	WEMCO Self-Primer
	• Stainless Steel 17-4PH Shaft
	• Cast Steel, High Chrome or CD4MCu Impeller
	• Ductile Iron Casing
	• Ductile Iron Fill Port Cover
	• Tool-less impeller adjustment
	• Passes stated solid size
	• Shim-less impeller adjustment
	• Higher <b>actual</b> efficiency
	• Solid Silicone Carbide Seal faces
	• More rugged & dependable
	• Lower "life cycle costs"
	• Industry leading 66 month warranty
	• Advanced safety features
	• Higher operating pressure
	• Directly interchangeable parts
	• Pump interchangeability
	<b>Total</b> ✓

**Add it up...** You'll see why the **WEMCO Self-Primer** offers more value...

- ✓ Materials/Design    ✓ Ease of Maintenance
- ✓ Pump Features      ✓ Safety Features
- ✓ More Dependable    ✓ Lower Operating Cost



**3" / 75 mm**  
 Head to: 112' • 34 M  
 Flow to: 450 GPM • 102 M<sup>3</sup>/hr  
 Solids size: 2.5 inch • 63.5 mm



**4" / 100 mm**  
 Head to: 115' • 35 M  
 Flow to: 730 GPM • 165 M<sup>3</sup>/hr  
 Solids size: 3 inch • 75 mm



**6" / 150 mm**  
 Head to: 109' • 33 M  
 Flow to: 1,480 GPM • 335 M<sup>3</sup>/hr  
 Solids size: 3 inch • 75 mm



**8" / 200 mm**  
 Head to: 109' • 33 M  
 Flow to: 2,600 GPM • 600 M<sup>3</sup>/hr  
 Solids size: 3 inch • 75 mm



**10" / 250 mm**  
 Head to: 129' • 39 M  
 Flow to: 3,200 GPM • 725 M<sup>3</sup>/hr  
 Solids size: 3 inch • 75 mm


Pump & Parts directly interchangeable with many GRESKO®, Pioneer® and Gorman-Rupp® pumps.



# WEMCO®


## Pumps & Systems

**You were born with the only tools you need to adjust the clearances of WEMCO Self Priming pumps. Your hands! NO tools are required for clean-out or impeller clearance adjustment!**

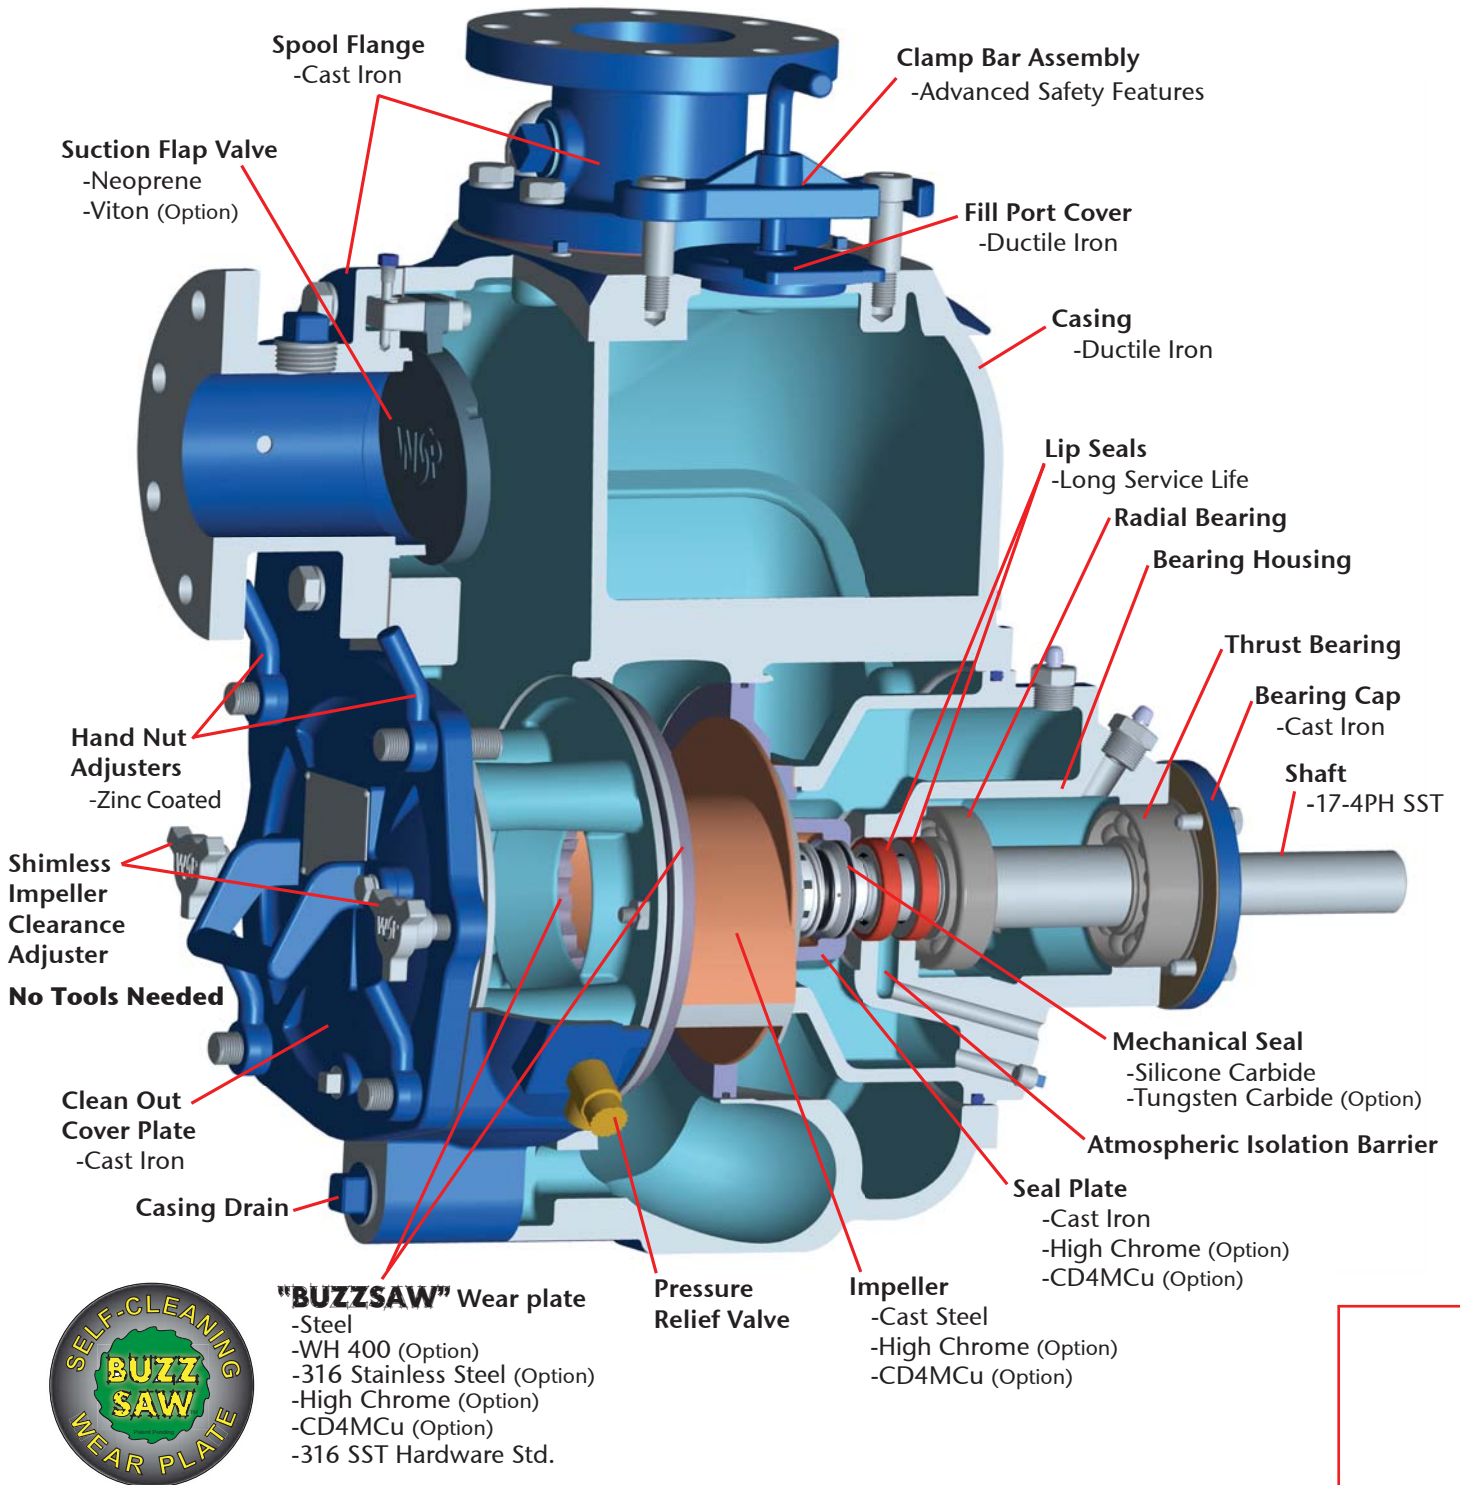

**Applications:** • Sewage • Animal Waste • Industrial Waste • Dewatering • Mining • Winery • Automotive • Beef/Pork/Poultry Processing • Pulp & Paper • Other Industrial Applications

**Operating Range**

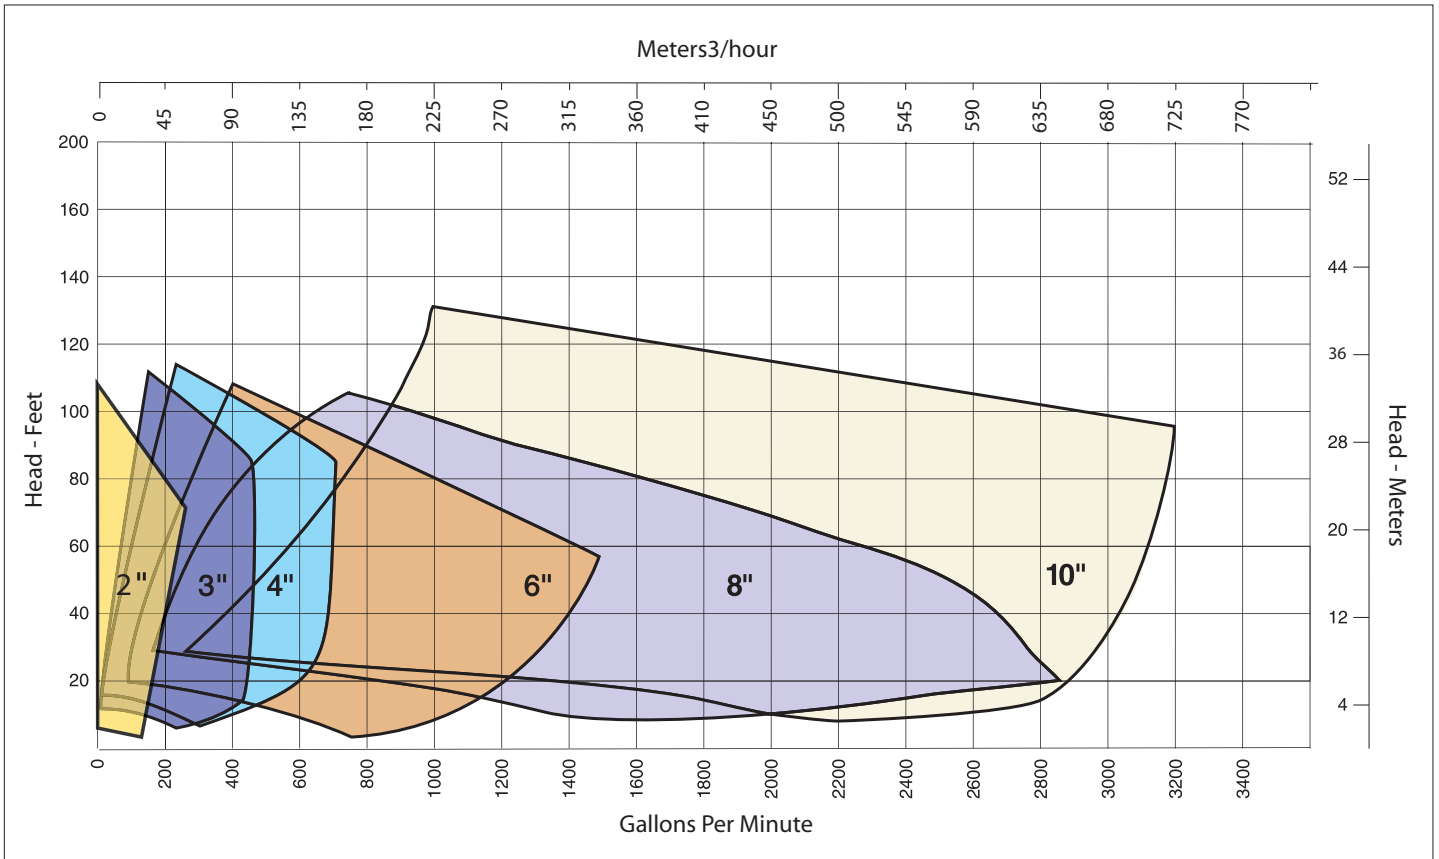

For More Information Contact:

**Weir Specialty Pumps**

440 West 800 South  
P.O. Box 209 (84110-0209)  
Salt Lake City, UT 84101  
USA

Tel: 1 801 359 8731  
Fax: 1 801 530 7828  
email: [info@weirsp.com](mailto:info@weirsp.com)  
[www.weirsp.com](http://www.weirsp.com)

© WEMCO Pump, 2012. All rights reserved. Bulletin: WSP 4 page products



**281-612-WRXS (9797)**

Excellent  
Engineering  
Solutions

