



WSP™ Self-Primer Pump


Solids Handling Self-Primer Pumps

3 x 3 in. (75 x 75 mm) curve

281-612-WRXS (9797)



440 W. 800 S. Salt Lake City, Utah 84110
 Phone: (801) 359-8731 Fax: (801) 355-9303

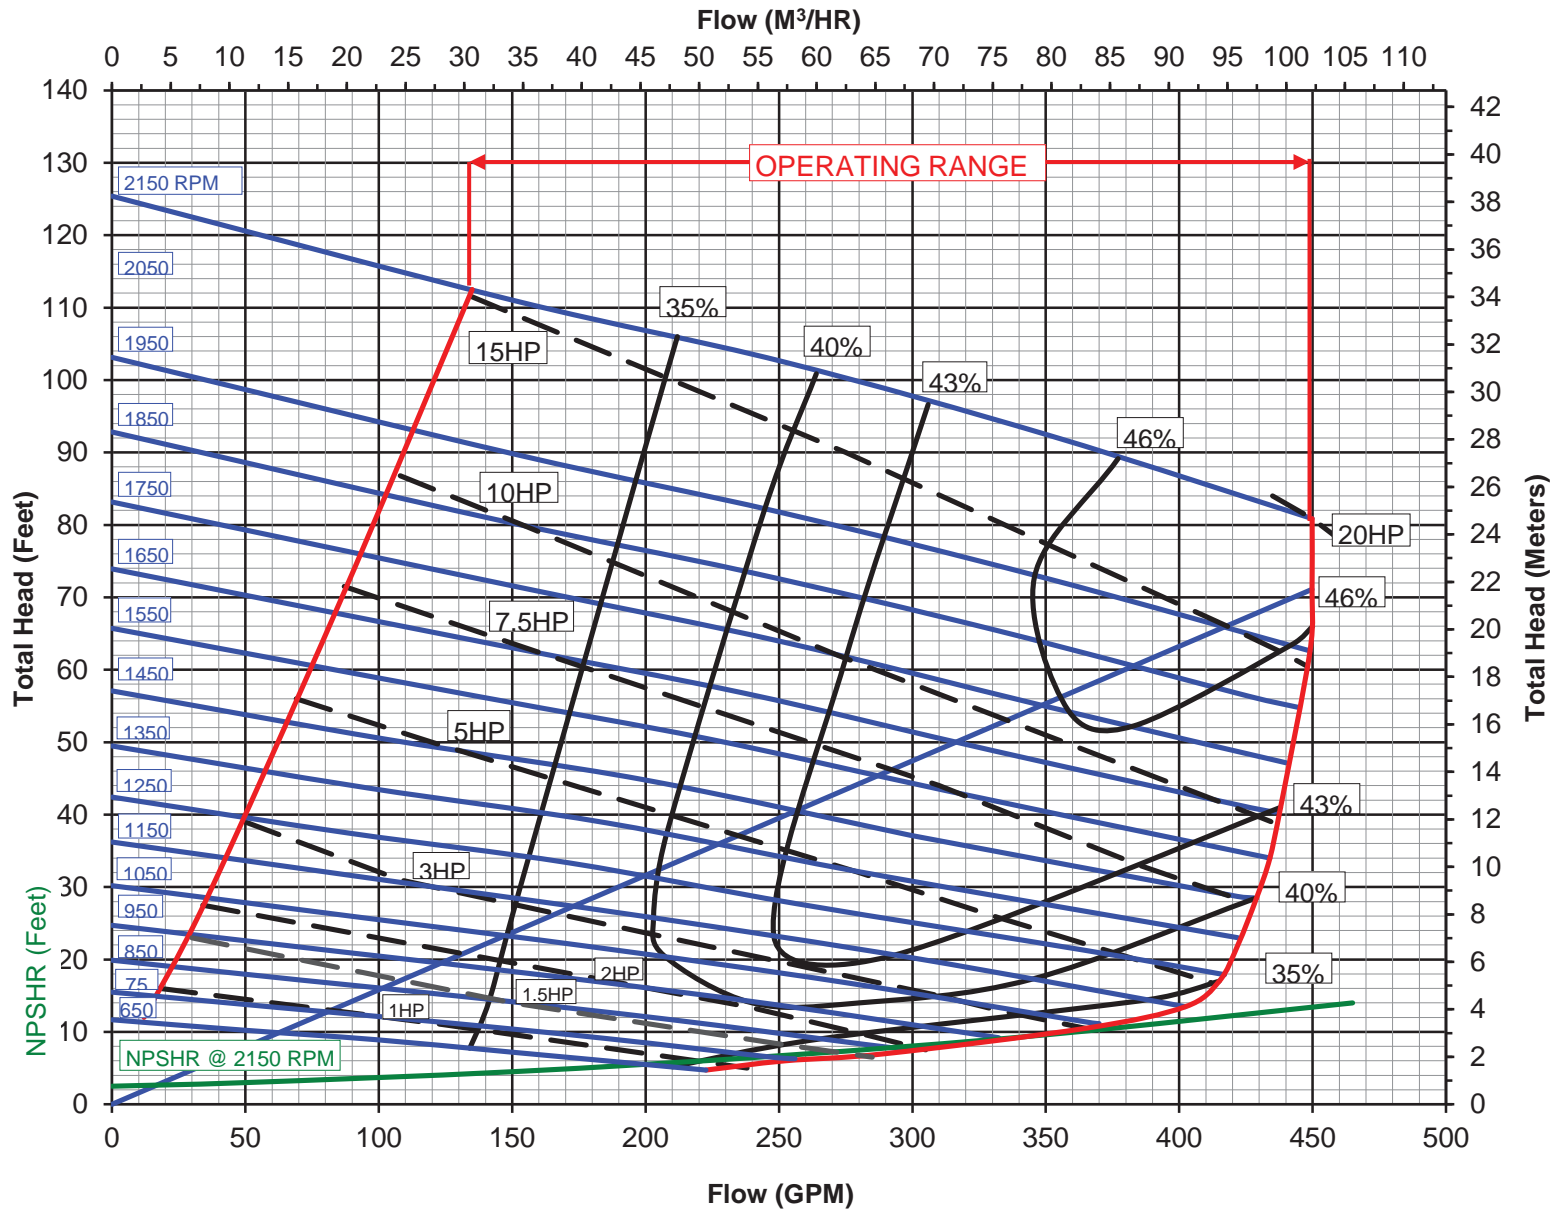

Suction: 3"
 Discharge: 3"
 Impeller Diameter: 8.75"
 Max. Solid Sphere: 2.50"

REPRIMING LIFTS	
RPM	FEET
650	5
750	6
850	8
950	10
1050	13
1150	16
1250	18
1350	19
1450	20
1550	21
1650-1750	22
1850-2150	25

Determine NPSHR prior to using repriming table. Do not use available suction lifts.

Clear Water Performance

$$BHP = \frac{GPM \times FT \times SG}{3960 \times Efficiency}$$

$$KW = \frac{M^3 / HR \times M \times SG}{367 \times Efficiency}$$



© Copyright All rights reserved 2002

Certified tests are performed using Hydraulic Institute acceptance level B.

November 2014

**RPM
 VARIABLE**

3-WSP