



WSP™ Self-Primer Pump


Solids Handling Self-Primer Pumps

4 x 4 in. (100 x 100 mm) curve

281-612-WRXS (9797)



440 W. 800 S. Salt Lake City, Utah 84110
 Phone: (801) 359-8731 Fax: (801) 355-9303

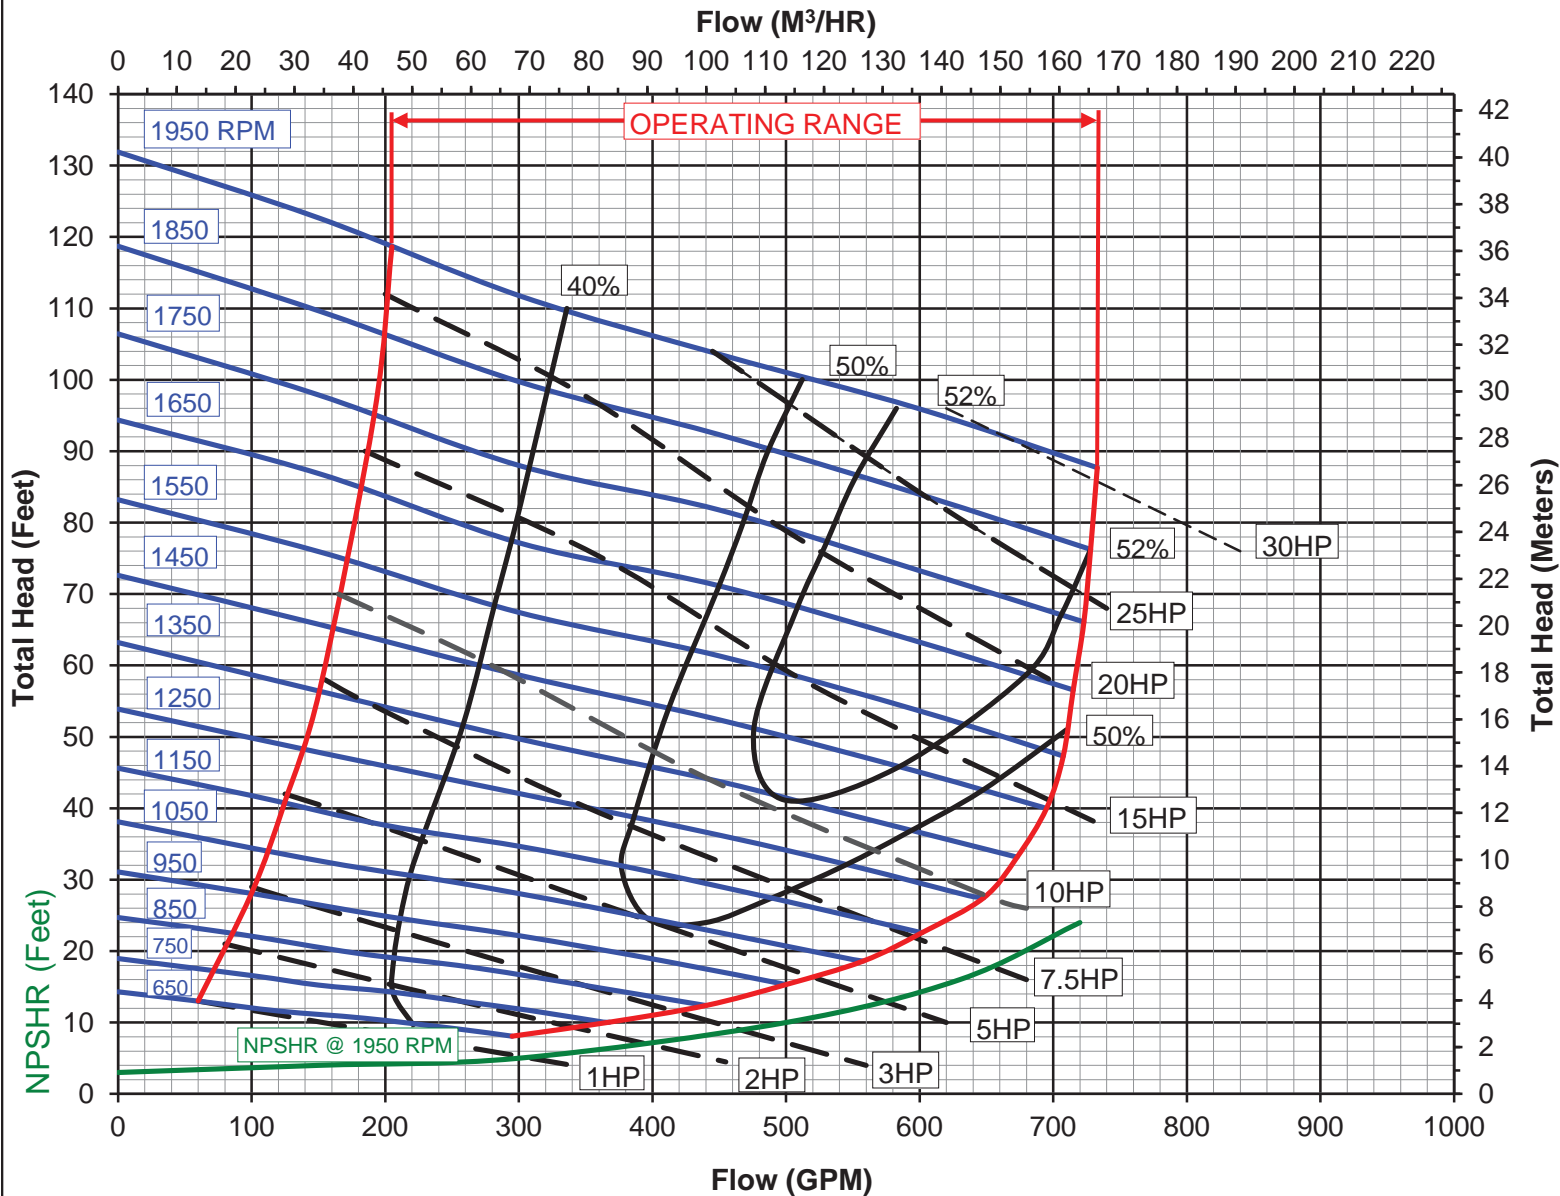

Suction: 4"
 Discharge: 4"
 Impeller Diameter: 9.75"
 Max. Solid Sphere: 3.00"

REPRIMING LIFTS	
RPM	FEET
650	5
750	8
850	16
950	19
1050	22
1150	24
1250-1950	25

Determine NPSHR prior to using repriming table. Do not use available suction lifts.

Clear Water Performance

$$BHP = \frac{GPM \times FT \times SG}{3960 \times Efficiency}$$

$$KW = \frac{M^3 / HR \times M \times SG}{367 \times Efficiency}$$



© Copyright All rights reserved 2002

Certified tests are performed using Hydraulic Institute acceptance level B.

November 2014

**RPM
 VARIABLE**

4-WSP